



P.O. BOX 850 | COWETA, OKLAHOMA 74429 | PH. (918) 486-2189 | FAX (918) 486-5366 | www.cityofcoweta-ok.gov

**AGENDA - REGULAR MEETING
COWETA PLANNING COMMISSION
COWETA CITY HALL, 310 S. BROADWAY
MONDAY, OCTOBER 16, 2023, 6:00 PM**

- I. CALL TO ORDER
- II. PLEDGE OF ALLEGIANCE
- III. ROLL CALL

Kristi Rentie ____

Jessica Morris ____

Tim Ahlstrom ____

Bruce Watkins ____

Joanna Jones ____

IV. CONSENT

(All matters under the "Consent Calendar" are considered by the Planning Commission to be routine and will be enacted by one motion. Any Commissioner may, however, remove an item from consent by request.)

1. Minutes Regular Meeting-9/18/2023

Approval of the minutes of the Coweta Planning Commission regular meeting held on September 18, 2023.

Documents:

[09-18-2023 PLANNING COMMISSION MINUTES.DOCX](#)

V. PUBLIC HEARINGS

1. Public Hearing: Preliminary Plat-The Woods IV Blocks 18-24

Public Hearing to accept public comment on a request for Preliminary Plat approval of The Woods IV Blocks 18-24, a subdivision of approximately 33.487 acres more or less with 97 lots, located in Section 36, Township 18 North, Range 15 East, of the Indian Base and Meridian, Wagoner County, State of Oklahoma. Part of Planned Unit Development PUD No. R 13-02, with RS-2 Residential Single Family and RM-1 Residential Multi-Family zoning.

Documents:

[PHNTHEWOODSPHASE IV BLOCKS 18-24.DOC](#)

VI. OLD BUSINESS

1. Preliminary Plat-The Woods IV Blocks 18-24

Discuss and consider possible action, on the approval, approval with conditions, or denial of a request for Preliminary Plat approval of The Woods IV Blocks 18-24, a subdivision of approximately 33.487 acres more or less with 97 lots. located in Section 36, Township 18 North, Range 15 East, of the Indian Base and Meridian, Wagoner County, State of Oklahoma. Part of Planned Unit Development PUD No. R 13-02, with RS-2 Residential Single Family and RM-1 Residential Multi-Family zoning.

Documents:

[23155_20230926_THE WOODS BLOCKS 18-24_PRELIMINARY PLAT.PDF](#)
[231016 PC STAFFREP.DOCX](#)

VII. NEW BUSINESS

VIII. ADJOURNMENT

IF YOU REQUIRE A SPECIAL ACCOMMODATION PURSUANT TO THE AMERICANS WITH DISABILITIES ACT, PLEASE NOTIFY CITY HALL BY 9:00 A.M. ON THE DATE OF THE MEETING.



P.O. BOX 850 | COWETA, OKLAHOMA 74429 | PH. (918) 486-2189 | FAX (918) 486-5366 | www.cityofcoweta-ok.gov

**MINUTES
COWETA PLANNING COMMISSION
COWETA CITY HALL,
310 S. BROADWAY MONDAY,
SEPTEMBER 18, 2023, 6:00 PM**

COMMISSIONERS PRESENT: Kristi Rentie, Bruce Watkins, and Tim Ahlstrom.

COMMISSIONERS ABSENT: Jessica Morris and Joanna Jones.

I. CALL TO ORDER

The meeting was called to order by Kristie Rentie at 6:00 p.m.

II. PLEDGE OF ALLEGIANCE-Given

III. ROLL CALL

Roll call taken. Planning Commission members were present as shown above.

IV. CONSENT

Motion by Tim Ahlstrom, second by Tim Ahlstrom to approve the consent calendar items:

1. Approval of the minutes of the Coweta Planning Commission meeting on August 21, 2023.

Aye: Kristie Rentie
Tim Ahlstrom
Bruce Watkins

V. OLD BUSINESS

1. CLS 23-10 MINOR SUBDIVISION

- Presentation by Robyn Murray of Community Development.

Tim Ahlstrom motion to approve and was seconded by Bruce Watkins.

Aye: Kristie Rentie
Bruce Watkins
Tim Ahlstrom

2. CLS 23-11 MINOR SUBDIVISION

- Presentation by Robyn Murray of Community Development and Tim Sadler of First National Bank of Coweta.

Tim Ahlstrom makes a motion to approve and was seconded by Bruce Watkins.

Aye: Kristie Rentie
Bruce Watkins
Tim Ahlstrom

VI. **NEW BUSINESS**

- No New Business

VII. **ADJOURNMENT**

Kristi Rentie makes a motion to adjourn the meeting and is seconded by Bruce Watkins.
The meeting was adjourned at 6:15 p.m.

Chairperson

Date

Secretary

Date

**NOTICE TO THE ADJOINING PROPERTY OWNERS OF A HEARING ON
THE PRELIMINARY PLAT FOR THE WOODS PHASE IV BLOCKS 18-24**

Notice is hereby given that a hearing will be held before the Coweta Planning Commission at 6:00 PM on Monday October 16, 2023 for approval of the Preliminary Plat for The Woods Phase IV Blocks 18-24 proposed (PUD-R 13-02) RS-2 Residential Single Family and RM-1 Residential Multi-Family Development for Residential uses.

At that time and place, consideration will be given to the request by Tulsa L Dev., LLC, Developer; Tanner Consulting, L.L.C, Survey/Engineer for the proposed Preliminary Plat approval of The Woods Phase IV Blocks 18-24, a subdivision of approximately 33.487 acres more or less with 97 lots. Located on the east side of State Highway 51 and South of East 111th Street South, in Section 36, Township 18 North, Range 15 East, of the Indian Base and Meridian, Wagoner County, State of Oklahoma. This land is zoned RS-2 (Residential Single Family) and RM-1 (Residential Multi-Family).

All persons interested in this matter may be present at this hearing and present their objections to or arguments for any or all of the above matters.

Any questions or comments on the proposed Preliminary Plat should be directed to Tom E Young Jr, City Planner at 918-279-7215.


Dated this 5th day of October 2023 in Coweta Oklahoma.

Preliminary Plat


PUD-R 13-02

The Woods
BLOCKS 18-24

PART OF THE NORTHWEST QUARTER (NW/4) AND PART OF THE SOUTHWEST QUARTER (SW/4)
AND PART OF THE SOUTHEAST QUARTER, ALL IN SECTION THIRTY-SIX (36)
TOWNSHIP EIGHTEEN (18) NORTH, RANGE FIFTEEN (15) EAST OF THE INDIAN MERIDIAN
A SUBDIVISION WITHIN THE CITY OF COWETA, WAGONER COUNTY, STATE OF OKLAHOMA



NORTH



Scale: 1"= 100'
Tanner Consulting


LEGEND

B/L	BUILDING LINE
B/U	BUILDING LINE & UTILITY EASEMENT
BK PG	BOOK & PAGE
CB	CHORD BEARING
CD	CHORD DISTANCE
CL	CENTERLINE
A	DELTA ANGLE
DOC	DOCUMENT
ESMT	EASEMENT
GOV'T	GOVERNMENT
ITB	INITIAL TANGENT BEARING
LNA	LIMITS OF NO ACCESS
ODE	OVERLAND DRAINAGE EASEMENT
RES.	RESERVE
R/W	RIGHT-OF-WAY
U/E	UTILITY EASEMENT
1234	ADDRESS ASSIGNED
o	FOUND MONUMENT
•	SET MONUMENT (SEE NOTE 2)

SUBDIVISION CONTAINS:

NINETY-SEVEN (97) LOTS
IN SEVEN (7) BLOCKS
WITH THREE (7) RESERVE AREAS

GROSS SUBDIVISION AREA: 33.487 ACRES

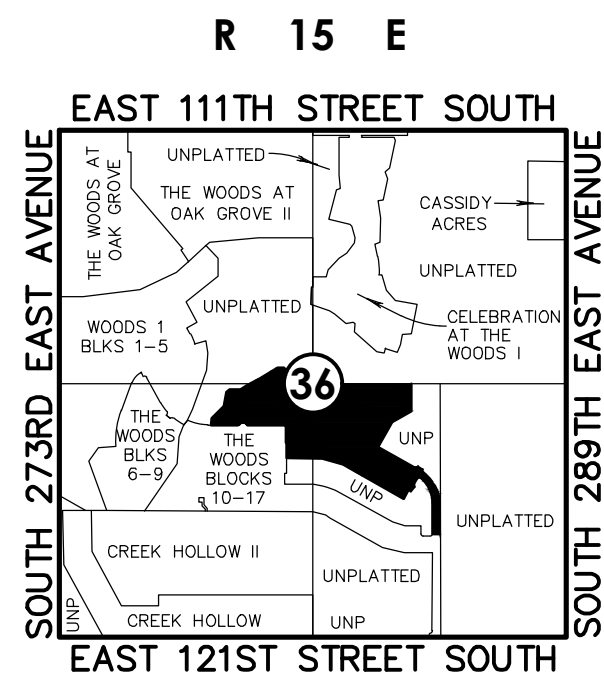


Location Map

Scale: 1"= 2000'



NORTH

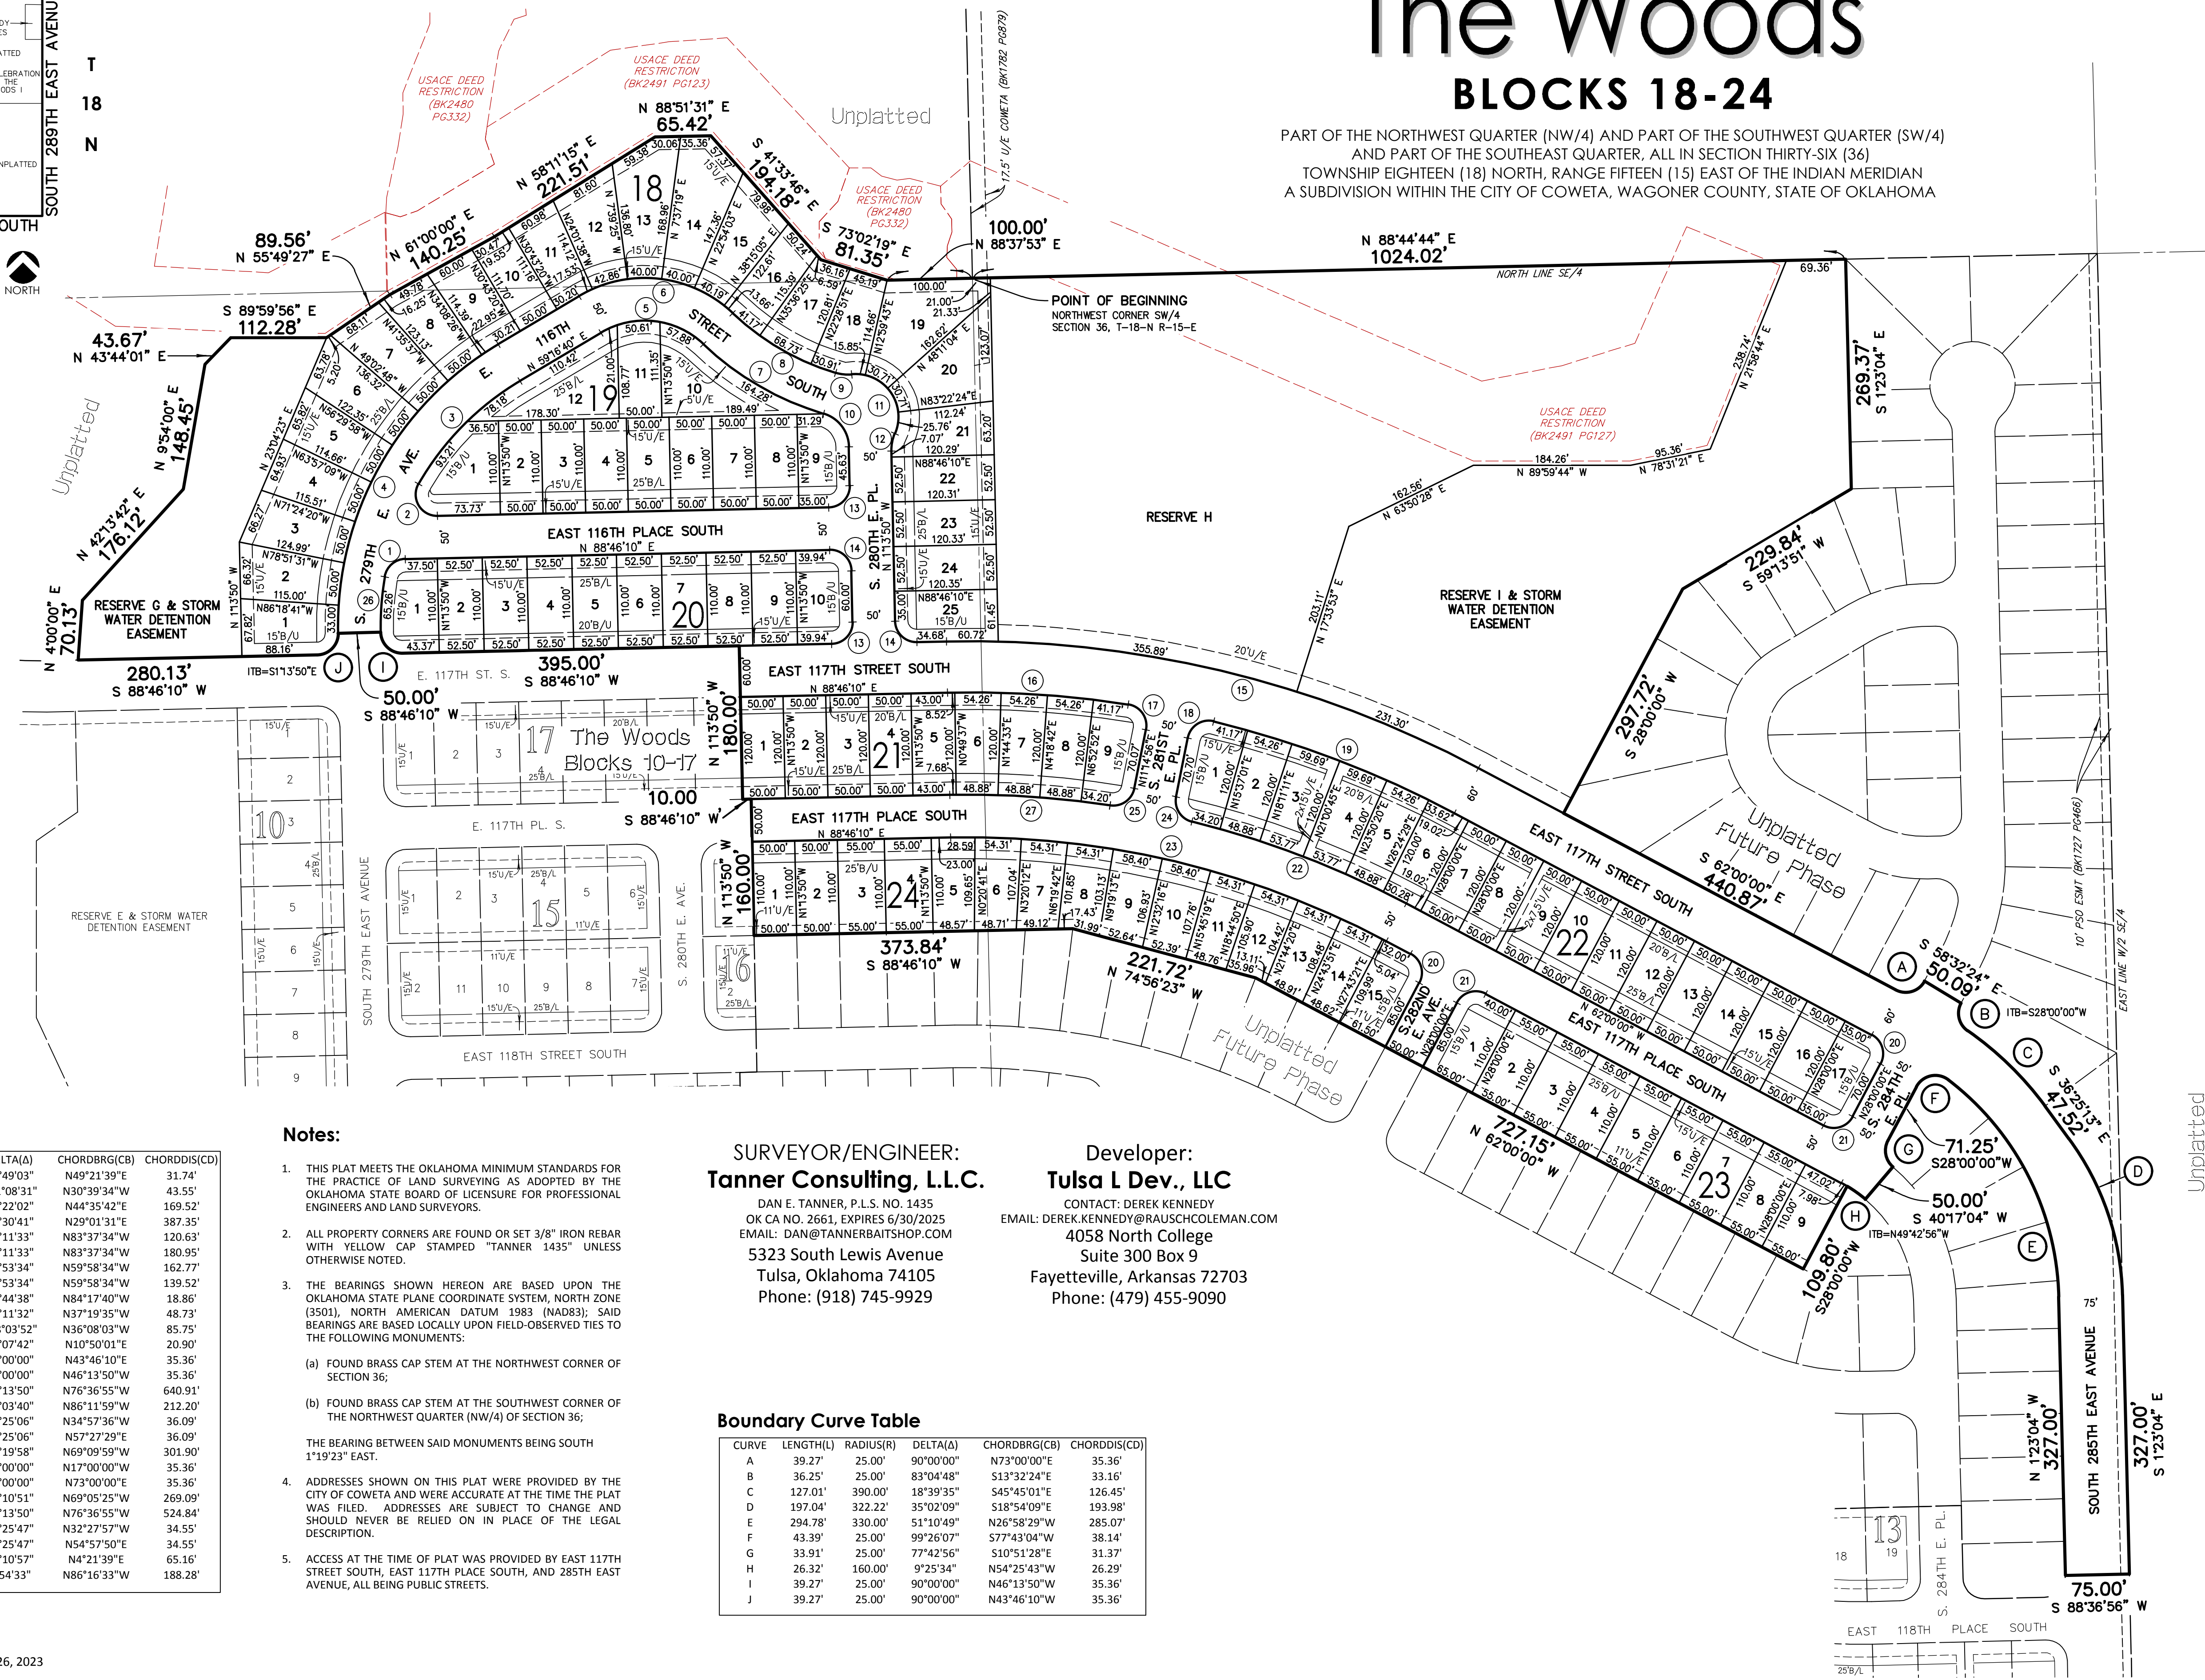

Curve Table

CURVE	LENGTH(L)	RADIUS(R)	DELTA(A)	CHORD(BRG)(CB)	CHORDDIS(CD)
1	34.39'	25.00'	78°49'03"	N49°21'39"E	31.74'
2	52.86'	25.00'	121°08'31"	N30°39'34"W	43.55'
3	171.39'	334.38'	29°22'02"	N44°35'42"E	169.52'
4	405.95'	384.38'	60°30'41"	N29°01'31"E	387.35'
5	129.49'	100.00'	74°11'33"	N83°37'34"W	120.63'
6	194.24'	150.00'	74°11'33"	N83°37'34"W	180.95'
7	164.28'	350.00'	26°53'34"	N59°58'34"W	162.77'
8	140.81'	300.00'	26°53'34"	N59°58'34"W	139.52'
9	18.98'	50.00'	21°44'38"	N84°17'40"W	18.86'
10	52.11'	41.36'	72°11'32"	N37°19'35"W	48.73'
11	103.03'	50.00'	118°03'52"	N36°08'03"W	85.75'
12	21.06'	50.00'	24°07'42"	N10°50'01"E	20.90'
13	39.27'	25.00'	90°00'00"	N43°46'10"E	35.36'
14	39.27'	25.00'	90°00'00"	N46°13'50"W	35.36'
15	647.91'	1270.00'	29°13'50"	N76°36'55"W	640.91'
16	212.48'	1210.00'	10°03'40"	N86°11'59"W	212.20'
17	40.33'	25.00'	92°25'06"	N34°57'36"W	36.09'
18	40.33'	25.00'	92°25'06"	N57°27'29"E	36.09'
19	302.69'	1210.00'	14°19'58"	N69°09'59"W	301.90'
20	39.27'	25.00'	90°00'00"	N17°00'00"W	35.36'
21	39.27'	25.00'	90°00'00"	N73°00'00"E	35.36'
22	269.78'	1090.00'	14°10'51"	N69°08'25"W	269.09'
23	530.57'	1040.00'	29°13'50"	N76°36'55"W	524.84'
24	38.15'	25.00'	87°25'47"	N32°27'57"W	34.55'
25	38.15'	25.00'	87°25'47"	N54°57'50"E	34.55'
26	65.26'	334.38'	11°10'57"	N42°13'39"E	65.16'
27	188.51'	1090.00'	9°54'33"	N86°16'33"W	188.28'

Notes:

- THIS PLAT MEETS THE OKLAHOMA MINIMUM STANDARDS FOR THE PRACTICE OF LAND SURVEYING AS ADOPTED BY THE OKLAHOMA STATE BOARD OF LICENSURE FOR PROFESSIONAL ENGINEERS AND LAND SURVEYORS.
- ALL PROPERTY CORNERS ARE FOUND OR SET 3/8" IRON REBAR WITH YELLOW CAP STAMPED "TANNER 1435" UNLESS OTHERWISE NOTED.
- THE BEARINGS SHOWN HEREON ARE BASED UPON THE OKLAHOMA STATE PLANE COORDINATE SYSTEM, NORTH ZONE (3501), NORTH AMERICAN DATUM 1983 (NAD83); SAID BEARINGS ARE BASED LOCALLY UPON FIELD-OBSERVED TIES TO THE FOLLOWING MONUMENTS:
(a) FOUND BRASS CAP STEM AT THE NORTHWEST CORNER OF SECTION 36;
(b) FOUND BRASS CAP STEM AT THE SOUTHWEST CORNER OF THE NORTHWEST QUARTER (NW/4) OF SECTION 36;
THE BEARING BETWEEN SAID MONUMENTS BEING SOUTH 1°19'23" EAST.
- ADDRESSES SHOWN ON THIS PLAT WERE PROVIDED BY THE CITY OF COWETA AND WERE ACCURATE AT THE TIME THE PLAT WAS FILED. ADDRESSES ARE SUBJECT TO CHANGE AND SHOULD NEVER BE RELIED ON IN PLACE OF THE LEGAL DESCRIPTION.
- ACCESS AT THE TIME OF PLAT WAS PROVIDED BY EAST 117TH STREET SOUTH, EAST 117TH PLACE SOUTH, AND 285TH EAST AVENUE, ALL BEING PUBLIC STREETS.

SURVEYOR/ENGINEER:
Tanner Consulting, L.L.C.

DAN E. TANNER, P.L.S. NO. 1435
OK CA NO. 2661, EXPIRES 6/30/2025
EMAIL: DAN@TANNERBAITSHOP.COM
5323 South Lewis Avenue
Tulsa, Oklahoma 74105
Phone: (918) 745-9929

Developer:
Tulsa L Dev., LLC

CONTACT: DEREK KENNEDY
EMAIL: DEREK.KENNEDY@RAUSCHCOLEMAN.COM
4058 North College
Suite 300 Box 9
Fayetteville, Arkansas 72703
Phone: (479) 455-9090

Boundary Curve Table

CURVE	LENGTH(L)	RADIUS(R)	DELTA(A)	CHORD(BRG)(CB)	CHORDDIS(CD)
A	39.27'	25.00'	90°00'00"	N73°00'00"E	35.36'
B	36.25'	25.00'	83°04'48"	S13°32'24"E	33.16'
C	127.01'	390.00'	18°39'35"	S45°45'01"E	126.45'
D	197.04'	322.22'	35°02'09"	S18°54'09"E	193.98'
E	294.78'	330.00'	51°10'49"	N26°58'29"W	285.07'
F	43.39'	25.00'	99°26'07"	S77°43'04"W	38.14'
G	33.91'	25.00'	77°42'56"	S10°51'28"E	31.37'
H	26.32'	160.00'	9°25'34"	N54°25'43"W	26.29'
I	39.27'	25.00'	90°00'00"	N46°13'50"W	35.36'
J	39.27'	25.00'	90°00'00"	N43°46'10"W	35.36'

DATE OF PREPARATION: September 26, 2023

Preliminary Plat

PUD-R 13-02

The Woods
BLOCKS 18-24

PART OF THE NORTHWEST QUARTER (NW/4) AND PART OF THE SOUTHWEST QUARTER (SW/4)
AND PART OF THE SOUTHEAST QUARTER, ALL IN SECTION THIRTY-SIX (36)
TOWNSHIP EIGHTEEN (18) NORTH, RANGE FIFTEEN (15) EAST OF THE INDIAN MERIDIAN
A SUBDIVISION WITHIN THE CITY OF COWETA, WAGONER COUNTY, STATE OF OKLAHOMA

DEED OF DEDICATION AND RESTRICTIVE COVENANTS

KNOW ALL MEN BY THESE PRESENTS:

THAT TULSA L DEV., LLC, AN OKLAHOMA LIMITED LIABILITY COMPANY, HEREINAFTER REFERRED TO AS THE "OWNER" AND/OR "DECLARANT," IS THE OWNER OF THE FOLLOWING REAL PROPERTY SITUATED IN THE CITY OF COWETA, WAGONER COUNTY, STATE OF OKLAHOMA, TO-WIT:

A TRACT OF LAND THAT IS A PART OF THE SOUTHEAST QUARTER (SE/4), A PART OF THE SOUTHWEST QUARTER (SW/4), AND A PART OF THE NORTHWEST QUARTER (NW/4), ALL IN SECTION THIRTY-SIX (36), TOWNSHIP EIGHTEEN (18) NORTH, RANGE FIFTEEN (15) EAST OF THE INDIAN MERIDIAN, CITY OF COWETA, WAGONER COUNTY, STATE OF OKLAHOMA, ACCORDING TO THE U.S. GOVERNMENT SURVEY THEREOF, SAID TRACT BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

BEGINNING AT THE NORTHWEST CORNER OF SAID SE/4; THENCE NORTH 88°44'44" EAST AND ALONG THE NORTH LINE OF THE SE/4, FOR A DISTANCE OF 1024.02 FEET; THENCE SOUTH 1°23'04" EAST FOR A DISTANCE OF 269.37 FEET; THENCE SOUTH 59°13'51" WEST FOR A DISTANCE OF 229.84 FEET; THENCE SOUTH 28°00'00" WEST FOR A DISTANCE OF 297.72; THENCE SOUTH 62°00'00" EAST FOR A DISTANCE OF 440.87 FEET TO A POINT OF CURVATURE; THENCE NORTHEASTERLY ALONG A 25.00-FOOT-RADIUS CURVE TO THE LEFT, HAVING A CENTRAL ANGLE OF 90°00'00", A CHORD BEARING AND DISTANCE OF NORTH 73°00'00" EAST FOR 35.36 FEET, FOR AN ARC DISTANCE OF 39.27 FEET; THENCE SOUTH 58°32'24" EAST FOR A DISTANCE OF 50.09 FEET; THENCE SOUTHEASTERLY ALONG A 25.00-FOOT-RADIUS CURVE TO THE LEFT, HAVING AN INITIAL TANGENT BEARING OF SOUTH 28°00'00" WEST, A CENTRAL ANGLE OF 83°04'48", A CHORD BEARING AND DISTANCE OF SOUTH 13°32'24" EAST FOR 33.16 FEET, FOR AN ARC DISTANCE OF 36.25 FEET TO A POINT OF REVERSE CURVATURE; THENCE SOUTHEASTERLY ALONG A 390.00-FOOT-RADIUS CURVE TO THE RIGHT, HAVING A CENTRAL ANGLE OF 18°39'35", A CHORD BEARING AND DISTANCE OF SOUTH 45°45'01" EAST FOR 126.45 FEET, FOR AN ARC DISTANCE OF 127.01 FEET TO A POINT OF TANGENCY; THENCE SOUTH 36°25'13" EAST FOR A DISTANCE OF 47.52 FEET TO A POINT OF CURVATURE;

THENCE SOUTHEASTERLY ALONG A 322.22-FOOT-RADIUS CURVE TO THE RIGHT, WITH A CENTRAL ANGLE OF 35°02'09", A CHORD BEARING AND DISTANCE OF SOUTH 18°54'09" EAST FOR 193.98 FEET, FOR AN ARC DISTANCE OF 197.04 FEET TO A POINT OF TANGENCY, SAID POINT BEING ON THE EAST LINE OF THE WEST HALF OF THE SE/4; THENCE SOUTH 1°23'04" EAST AND ALONG SAID EAST LINE, FOR A DISTANCE OF 327.00 FEET; THENCE SOUTH 88°36'56" WEST AN PERPENDICULAR TO THE EAST LINE, FOR A DISTANCE OF 75.00 FEET; THENCE NORTH 1°23'04" WEST AND PARALLEL WITH THE EAST LINE, FOR A DISTANCE OF 327.00 FEET TO A POINT OF CURVATURE; THENCE NORTHWESTERLY ALONG A 330.00-FOOT-RADIUS CURVE TO THE LEFT, HAVING A CENTRAL ANGLE OF 51°10'49", A CHORD BEARING AND DISTANCE OF NORTH 26°58'29" WEST FOR 285.07 FEET, FOR AN ARC DISTANCE OF 294.78 FEET TO A POINT OF COMPOUND CURVATURE; THENCE SOUTHWESTERLY ALONG A 25.00-FOOT-RADIUS CURVE TO THE LEFT, HAVING A CENTRAL ANGLE OF 99°26'07", A CHORD BEARING AND DISTANCE OF SOUTH 77°43'04" WEST FOR A DISTANCE OF 38.14 FEET, FOR AN ARC DISTANCE OF 43.39 FEET TO A POINT OF TANGENCY; THENCE SOUTH 28°00'00" WEST FOR A DISTANCE OF 71.25 FEET TO A POINT OF CURVATURE; THENCE SOUTHEASTERLY ALONG A 25.00-FOOT-RADIUS CURVE TO THE LEFT, HAVING A CENTRAL ANGLE OF 77°42'56", A CHORD BEARING AND DISTANCE OF SOUTH 10°51'28" EAST FOR 31.37 FEET, FOR AN ARC DISTANCE OF 33.91 FEET; THENCE SOUTH 40°17'04" WEST FOR A DISTANCE OF 50.00 FEET; THENCE NORTHEASTERLY ALONG A 160.00-FOOT-RADIUS NON-TANGENT CURVE TO THE LEFT, HAVING AN INITIAL TANGENT BEARING OF NORTH 49°42'56" WEST, A CENTRAL ANGLE OF 9°25'34", A CHORD BEARING AND DISTANCE OF NORTH 54°25'43" WEST FOR 26.29 FEET, FOR AN ARC DISTANCE OF 26.32 FEET; THENCE SOUTH 28°00'00" WEST FOR A DISTANCE OF 109.80 FEET;

THENCE NORTH 62°00'00" WEST FOR A DISTANCE OF 727.15 FEET; THENCE NORTH 74°56'23" WEST FOR A DISTANCE OF 221.72 FEET; THENCE SOUTH 88°46'10" WEST FOR A DISTANCE OF 373.84 FEET; THENCE NORTH 1°13'50" WEST FOR A DISTANCE OF 160.00 FEET; THENCE SOUTH 88°46'10" WEST FOR A DISTANCE OF 10.00 FEET; THENCE NORTH 1°13'50" WEST FOR A DISTANCE OF 180.00 FEET; THENCE SOUTH 88°46'10" WEST FOR A DISTANCE OF 395.00 FEET TO A POINT OF CURVATURE; THENCE NORTHWESTERLY ALONG A 25.00-FOOT-RADIUS CURVE TO THE RIGHT, HAVING A CENTRAL ANGLE OF 90°00'00", A CHORD BEARING AND DISTANCE OF NORTH 46°13'50" WEST FOR 35.36 FEET, FOR AN ARC DISTANCE OF 39.27 FEET; THENCE SOUTH 88°46'10" WEST FOR A DISTANCE OF 50.00 FEET; THENCE SOUTHWESTERLY ALONG A 25.00-FOOT-RADIUS NON-TANGENT CURVE TO THE LEFT, HAVING AN INITIAL TANGENT BEARING OF SOUTH 1°13'50" EAST, A CENTRAL ANGLE OF 90°00'00", A CHORD BEARING AND DISTANCE OF SOUTH 43°46'10" WEST FOR 35.36 FEET, FOR AN ARC DISTANCE OF 39.27 FEET; THENCE SOUTH 88°46'10" WEST FOR A DISTANCE OF 280.13 FEET; THENCE NORTH 4°00'00" EAST FOR A DISTANCE OF 70.13 FEET; THENCE NORTH 42°13'42" EAST FOR A DISTANCE OF 176.12 FEET; THENCE NORTH 09°54'00" EAST FOR A DISTANCE OF 148.45 FEET; THENCE NORTH 43°44'01" EAST FOR A DISTANCE OF 43.67 FEET; THENCE SOUTH 89°59'56" EAST FOR A DISTANCE OF 112.28 FEET; THENCE NORTH 55°49'27" EAST FOR A DISTANCE OF 89.56 FEET; THENCE NORTH 61°00'00" EAST FOR A DISTANCE OF 140.25 FEET; THENCE NORTH 58°11'15" EAST FOR A DISTANCE OF 221.51 FEET; THENCE NORTH 88°51'31" EAST FOR A DISTANCE OF 65.42 FEET; THENCE SOUTH 41°33'46" EAST FOR A DISTANCE OF 194.18 FEET; THENCE SOUTH 73°02'19" EAST FOR A DISTANCE OF 81.35 FEET TO A POINT ON THE SOUTH LINE OF THE SE/4 NW/4; THENCE NORTH 88°45'01"EAST AND ALONG SAID SOUTH LINE, FOR A DISTANCE OF 100.00 FEET TO THE POINT OF BEGINNING;

SAID TRACT CONTAINING 1,458,699 SQUARE FEET OR 33.487 ACRES.

THE BEARINGS SHOWN HEREON ARE BASED UPON THE OKLAHOMA STATE PLANE COORDINATE SYSTEM, NORTH ZONE (3501), NORTH AMERICAN DATUM 1983 (NAD83); SAID BEARINGS ARE BASED LOCALLY UPON FIELD-OBSERVED TIES TO THE FOLLOWING MONUMENTS:

- (A) ODOT BRASS CAP FOUND AT THE NORTHWEST CORNER OF SECTION 36;
- (B) ODOT BRASS CAP FOUND AT THE SOUTHWEST CORNER OF THE NORTHWEST QUARTER (NW/4) OF SECTION 36;

THE BEARING BETWEEN SAID MONUMENTS BEING SOUTH 1°19'23" EAST.

AND THE OWNER HAS CAUSED THE ABOVE-DESCRIBED LAND TO BE SURVEYED, STAKED, PLATTED, DEDICATED, ACCESS RIGHTS RESERVED, AND SUBDIVIDED INTO NINETY-SEVEN (97) LOTS IN SEVEN (7) BLOCKS ALONG WITH THE RESERVE AREAS, COMMON AREAS, AND STREETS IN CONFORMITY WITH THE ACCOMPANYING PLAT AND SURVEY ("THE

PLAT") AND HAS DESIGNATED THE SUBDIVISION AS "THE WOODS BLOCKS 18-24," A SUBDIVISION WITHIN THE CITY OF COWETA, WAGONER COUNTY, OKLAHOMA ("SUBDIVISION"). THE OWNER HEREBY SUBJECTS THE LAND DESCRIBED ABOVE TO THE PROVISIONS, COVENANTS, AND RESTRICTIONS SET FORTH HEREIN WHICH SHALL RUN WITH THE LAND AND BE BINDING ON EVERY LOT AND RESERVE AREA AND EVERY OWNER THEREOF FOR THE PERIOD AS HEREAFTER DEFINED.

SECTION I. PUBLIC STREETS, EASEMENTS, AND UTILITIES

A. PUBLIC STREETS AND UTILITY EASEMENTS

THE OWNER DOES HEREBY DEDICATE FOR PUBLIC USE THE STREET RIGHTS-OF-WAY DEPICTED ON THE ACCOMPANYING PLAT AND DOES FURTHER DEDICATE FOR PUBLIC USE THE UTILITY EASEMENTS AS DEPICTED ON THE ACCOMPANYING PLAT AS "U/E" OR "UTILITY EASEMENT" FOR THE SEVERAL PURPOSES OF CONSTRUCTING, MAINTAINING, OPERATING, REPAIRING, REPLACING, AND/OR REMOVING ANY AND ALL PUBLIC UTILITIES, INCLUDING STORM SEWERS, SANITARY SEWERS, COMMUNICATION LINES, ELECTRIC POWER LINES AND TRANSFORMERS, GAS LINES, AND WATERLINES, TOGETHER WITH ALL VALVES, METERS, AND EQUIPMENT FOR EACH OF SUCH FACILITIES AND OTHER APPURTENANCES THERETO, WITH THE RIGHTS OF INGRESS AND EGRESS TO AND UPON THE UTILITY EASEMENTS FOR THE USES AND PURPOSES AFORESAID, TOGETHER WITH SIMILAR EASEMENT RIGHTS IN THE PUBLIC STREETS, PROVIDED HOWEVER, THAT THE OWNER HEREBY RESERVES THE RIGHT TO CONSTRUCT AND MAINTAIN WATERLINES AND SEWERLINES WITHIN THE UTILITY EASEMENTS FOR THE PURPOSE OF FURNISHING WATER AND/OR SEWER SERVICE TO AREAS WITHIN OR OUTSIDE THE PLAT AND THE OWNER FURTHER RESERVES THE RIGHT TO CONSTRUCT AND MAINTAIN WITHIN THE UTILITY EASEMENTS PROPERLY-PERMITTED PARKING AREAS, LANDSCAPING, SCREENING FENCES AND WALLS, AND OTHER NON-OBSTRUCTING IMPROVEMENTS.

B. WATER, SANITARY SEWER, AND STORM SEWER SERVICE

1. EACH LOT AND RESERVE AREA OWNER SHALL BE RESPONSIBLE FOR THE PROTECTION OF THE PUBLIC WATER MAINS, SANITARY SEWER MAINS, AND STORM SEWERS LOCATED ON THE LOT OR RESERVE AREA.

2. WITHIN THE DEPICTED UTILITY EASEMENT AREAS, THE ALTERATION OF GRADE IN EXCESS OF THREE (3) FEET FROM THE CONTOURS EXISTING UPON THE COMPLETION OF THE INSTALLATION OF A PUBLIC WATER MAIN, SANITARY SEWER MAIN, OR STORM SEWER, OR ANY CONSTRUCTION ACTIVITY WHICH MAY INTERFERE WITH PUBLIC WATER, SANITARY SEWER MAIN, OR STORM SEWERS, SHALL BE PROHIBITED. WITHIN THE UTILITY EASEMENTS, IF THE GROUND ELEVATIONS ARE ALTERED BY THE LOT OR RESERVE AREA OWNER FROM THE CONTOURS EXISTING UPON THE COMPLETION OF THE INSTALLATION OF A PUBLIC WATER MAIN, SANITARY SEWER MAIN, OR STORM SEWER, ALL GROUND LEVEL APPURTENANCES, INCLUDING VALVE BOXES, FIRE HYDRANTS, AND MANHOLES SHALL BE ADJUSTED TO THE ALTERED GROUND ELEVATIONS BY THE OWNER OF THE LOT OR RESERVE AREA OR, AT ITS ELECTION, THE CITY OF COWETA, OKLAHOMA, MAY MAKE SUCH ADJUSTMENT AT SUCH OWNER'S EXPENSE.

3. WAGONER COUNTY RURAL WATER DISTRICT NO. 5 OR ITS SUCCESSORS SHALL BE RESPONSIBLE FOR ORDINARY MAINTENANCE OF PUBLIC WATER FACILITIES, AND THE CITY OF COWETA OR ITS SUCCESSORS SHALL BE RESPONSIBLE FOR ORDINARY MAINTENANCE OF SANITARY SEWER AND STORM SEWER FACILITIES, BUT THE LOT OR RESERVE AREA OWNER SHALL PAY FOR DAMAGE OR RELOCATION OF SUCH FACILITIES CAUSED OR NECESSITATED BY ACTS OF SAID OWNER OR SAID OWNER'S AGENTS OR CONTRACTORS.

4. WAGONER COUNTY RURAL WATER DISTRICT NO. 5 AND THE CITY OF COWETA, OR THEIR RESPECTIVE SUCCESSORS, SHALL AT ALL TIMES HAVE RIGHT OF ACCESS WITH THEIR EQUIPMENT TO ALL UTILITY EASEMENTS DEPICTED ON THE PLAT OR OTHERWISE PROVIDED FOR IN THIS DEED OF DEDICATION FOR THE PURPOSE OF INSTALLING, MAINTAINING, REMOVING, OR REPLACING ANY PORTION OF UNDERGROUND WATER, SANITARY SEWER, OR STORM SEWER FACILITIES.

5. THE FOREGOING COVENANTS SET FORTH IN THIS SUBSECTION B. SHALL BE ENFORCEABLE BY THE CITY OF COWETA AND WAGONER COUNTY RURAL WATER DISTRICT NO. 5, OR THEIR RESPECTIVE SUCCESSORS, AND EACH LOT AND RESERVE AREA OWNER AGREES TO BE BOUND HEREBY.

C. UNDERGROUND SERVICE

1. OVERHEAD LINES FOR THE SUPPLY OF ELECTRIC AND COMMUNICATION SERVICES MAY BE LOCATED WITHIN THE PERIMETER UTILITY EASEMENTS OF SUBDIVISION, STREET LIGHT POLES OR STANDARDS MAY BE SERVED BY UNDERGROUND CABLE THROUGHOUT THE SUBDIVISION AND, EXCEPT AS PROVIDED IN THE IMMEDIATELY-PRECEDING SENTENCE, ALL SUPPLY LINES INCLUDING ELECTRIC, COMMUNICATION, AND GAS LINES SHALL BE LOCATED UNDERGROUND IN THE EASEMENT WAYS DEDICATED FOR GENERAL UTILITY SERVICES AND IN THE RIGHTS-OF-WAY OF THE PUBLIC STREETS AS DEPICTED ON THE ACCOMPANYING PLAT. SERVICE PEDESTALS AND TRANSFORMERS, AS SOURCES OF SUPPLY AT SECONDARY VOLTAGES, MAY ALSO BE LOCATED IN THE UTILITY EASEMENTS.

2. UNDERGROUND SERVICE CABLES AND GAS SERVICE LINES TO ALL STRUCTURES WHICH MAY BE LOCATED WITHIN THE SUBDIVISION MAY BE RUN FROM THE NEAREST GAS MAIN, SERVICE PEDESTAL, OR TRANSFORMER TO THE POINT OF USAGE DETERMINED BY THE LOCATION AND CONSTRUCTION OF SUCH STRUCTURE AS MAY BE LOCATED UPON THE LOT. PROVIDED THAT, UPON THE INSTALLATION OF A SERVICE CABLE OR GAS SERVICE LINE TO A PARTICULAR STRUCTURE, THE SUPPLIER OF SERVICE SHALL THEREAFTER BE DEEMED TO HAVE A DEFINITIVE, PERMANENT, EFFECTIVE, AND NON-EXCLUSIVE RIGHT-OF-WAY EASEMENT ON THE LOT, COVERING A 5 FOOT STRIP EXTENDING 2.5 FEET ON EACH SIDE OF THE SERVICE CABLE OR LINE EXTENDING FROM THE GAS MAIN, SERVICE PEDESTAL, OR TRANSFORMER TO THE SERVICE ENTRANCE ON THE STRUCTURE.

3. THE SUPPLIER OF ELECTRIC, COMMUNICATION, AND GAS SERVICES, THROUGH ITS AGENTS AND EMPLOYEES, SHALL AT ALL TIMES HAVE THE RIGHT OF ACCESS WITH ITS EQUIPMENT TO ALL UTILITY EASEMENTS SHOWN ON THE PLAT OR OTHERWISE PROVIDED FOR IN THIS DEED OF DEDICATION FOR THE PURPOSE OF INSTALLING, MAINTAINING, REMOVING, OR REPLACING ANY PORTION OF THE ELECTRIC, COMMUNICATION, OR GAS FACILITIES INSTALLED BY THE SUPPLIER OF THE UTILITY SERVICE.

4. THE LOT OR RESERVE AREA OWNER SHALL BE RESPONSIBLE FOR THE PROTECTION OF THE UNDERGROUND SERVICE FACILITIES LOCATED ON SAID OWNER'S LOT OR RESERVE AREA AND SHALL PREVENT THE ALTERATION OF GRADE OR ANY CONSTRUCTION ACTIVITY WHICH WOULD INTERFERE WITH THE ELECTRIC, COMMUNICATION, OR GAS FACILITIES. EACH SUPPLIER OF SERVICE SHALL BE RESPONSIBLE FOR ORDINARY MAINTENANCE OF UNDERGROUND FACILITIES, BUT THE LOT OR RESERVE AREA OWNER SHALL PAY FOR DAMAGE OR RELOCATION OF SUCH FACILITIES CAUSED OR NECESSITATED BY ACTS OF SAID OWNER OR SAID OWNER'S AGENTS OR CONTRACTORS.

5. THE FOREGOING COVENANTS SET FORTH IN THIS PARAGRAPH C. SHALL BE ENFORCEABLE BY EACH SUPPLIER OF THE ELECTRIC, COMMUNICATION, OR GAS SERVICE AND EACH LOT AND RESERVE AREA OWNER AGREES TO BE BOUND HEREBY.

D. PAVING AND LANDSCAPING WITHIN EASEMENTS

THE OWNER OF THE LOT OR RESERVE AREA SHALL BE RESPONSIBLE FOR REPAIR OF DAMAGE TO LANDSCAPING AND PAVING RESULTING FROM THE ACTIONS OF THE CITY OF COWETA OR THE SUPPLIER OF UTILITY SERVICES, IN PERFORMING NECESSARY INSTALLATION OF OR MAINTENANCE TO THE UNDERGROUND WATER, SANITARY SEWER, STORM SEWER, GAS, COMMUNICATION, OR ELECTRIC FACILITIES WITHIN THE UTILITY EASEMENTS DEPICTED ON THE ACCOMPANYING PLAT; PROVIDED, HOWEVER, THAT THE CITY OF COWETA, OR THE SUPPLIER OF THE UTILITY SERVICE, SHALL USE REASONABLE CARE IN THE PERFORMANCE OF SUCH ACTIVITIES.

E. SURFACE DRAINAGE

EACH LOT AND RESERVE AREA WITHIN THE SUBDIVISION SHALL RECEIVE AND DRAIN, IN AN UNOBSTRUCTED MANNER, THE STORM AND SURFACE WATERS FROM LOTS, RESERVE AREAS, AND DRAINAGE AREAS OF HIGHER ELEVATION AND FROM ADJACENT STREETS AND EASEMENTS. NO LOT OR RESERVE AREA OWNER SHALL CONSTRUCT OR PERMIT TO BE CONSTRUCTED ANY FENCING OR OTHER OBSTRUCTIONS WHICH WOULD IMPAIR THE DRAINAGE OF STORM AND SURFACE WATERS OVER AND ACROSS SAID OWNER'S LOT OR RESERVE AREA. THE COVENANTS SET FORTH IN THIS SUBSECTION E. SHALL BE ENFORCEABLE BY ANY AFFECTED LOT OR RESERVE AREA OWNER AND THE CITY OF COWETA, OKLAHOMA.

F. STORM WATER DETENTION EASEMENTS

1. THE OWNER/DECLARANT DOES HEREBY ESTABLISH AND GRANT TO THE PUBLIC A PERPETUAL EASEMENTS ON, OVER, AND ACROSS RESERVES G AND I, DESIGNATED ON THE ACCOMPANYING PLAT AS "STORM WATER DETENTION EASEMENT", FOR THE PURPOSES OF PERMITTING THE FLOW, CONVEYANCE, DETENTION, RETENTION, AND DISCHARGE OF STORMWATER RUNOFF FROM THE VARIOUS AREAS WITHIN THE SUBDIVISION.

2. STORMWATER DETENTION AND OTHER DRAINAGE FACILITIES WITHIN THE STORM WATER DETENTION EASEMENTS SHALL BE CONSTRUCTED IN ACCORDANCE WITH STANDARDS AND SPECIFICATIONS APPROVED BY THE CITY OF COWETA, OKLAHOMA.

3. STORMWATER DETENTION AND OTHER DRAINAGE FACILITIES CONSTRUCTED WITHIN THE STORM WATER DETENTION EASEMENTS SHALL BE MAINTAINED BY THE HOME OWNERS ASSOCIATION (TO BE FORMED PURSUANT TO SECTION III. HEREOF) TO THE EXTENT NECESSARY TO ACHIEVE THE INTENDED DRAINAGE AND DETENTION FUNCTIONS, INCLUDING REPAIR OF APPURTENANCES AND REMOVAL OF OBSTRUCTIONS AND SILTATION, AND THE HOME OWNERS ASSOCIATION SHALL PROVIDE ROUTINE AND CUSTOMARY GROUNDS MAINTENANCE WITHIN THE STORM WATER DETENTION EASEMENTS WHICH SHALL BE IN ACCORDANCE WITH THE FOLLOWING STANDARDS:

- a. THE EASEMENT AREAS SHALL BE KEPT FREE OF LITTER.
- b. THE EASEMENT AREAS SHALL BE MOWED DURING THE GROWING SEASON AS PER CITY CODE OR THE SCHEDULE APPROVED WITH THE STORMWATER DETENTION DESIGN PLANS.
- c. IN THE EVENT OF THE HOME OWNERS ASSOCIATION SHOULD FAIL TO PROPERLY MAINTAIN THE EASEMENT AREAS AS ABOVE PROVIDED, THE CITY OF COWETA, OKLAHOMA, OR ITS DESIGNATED CONTRACTOR, MAY ENTER THE EASEMENT AREA AND PERFORM SUCH MAINTENANCE, AND THE COST THEREOF SHALL BE PAID BY THE RESERVE G OR RESERVE I OWNER, WHICH SHALL BE THE HOME OWNERS ASSOCIATION, AS SET FORTH IN SECTION III. HEREIN, UPON CONVEYANCE OF RESERVE G AND I TO THE ASSOCIATION.
- d. IN THE EVENT THE RESERVES G OR I OWNER, AFTER COMPLETION OF THE MAINTENANCE AND RECEIPT OF A STATEMENT OF COSTS, FAILS TO PAY THE COST OF MAINTENANCE AS ABOVE SET FORTH, THE CITY OF COWETA, OKLAHOMA, MAY FILE OF RECORD A COPY OF THE STATEMENT OF COSTS AND THEREAFTER THE COSTS SHALL BECOME A LIEN ON RESERVES G OR I, WHICH LIEN MAY BE FORECLOSED BY THE CITY OF COWETA, OKLAHOMA, OR THE CITY OF COWETA PUBLIC WORKS AUTHORITY MAY ADD SUCH BILLING PRORATED UPON THE WATER BILL OF EACH LOT WITHIN THE SUBDIVISION, WHICH METHOD OF COLLECTION SHALL BE DETERMINED BY THE CITY OF COWETA.

7. ALL COSTS AND EXPENSES ASSOCIATED WITH THE STORM WATER DETENTION EASEMENT AREAS AND RESERVES G AND I, INCLUDING MAINTENANCE OF VARIOUS IMPROVEMENTS AND RECREATIONAL FACILITIES, SHALL BE THE RESPONSIBILITY OF THE OWNER THEREOF, WHICH SHALL BE THE HOME OWNERS ASSOCIATION, AS PROVIDED IN SECTION III. HEREIN, UPON CONVEYANCE OF RESERVES G AND I TO THE ASSOCIATION, THE CITY OF COWETA SHALL NOT BE LIABLE FOR ANY DAMAGE OR REMOVAL OF ANY LANDSCAPING OR IRRIGATION SYSTEMS IN RESERVES G OR I.

G. RESERVE AREAS

1. RESERVES G, H, AND I, AS DEPICTED UPON THE ACCOMPANYING PLAT, ARE ESTABLISHED BY THE OWNER FOR THE COMMON USE AND BENEFIT OF THE OWNERS OF RESIDENTIAL LOTS WITHIN THE SUBDIVISION AND ARE HEREBY RESERVED FOR SUBSEQUENT CONVEYANCE TO THE HOME OWNERS ASSOCIATION AS SET FORTH IN SECTION III. HEREIN.

2. RESERVES G AND I ARE DESIGNATED FOR STORMWATER DRAINAGE AND DETENTION AND PRIVATE RECREATION AND OPEN SPACE INCLUDING, BUT NOT NECESSARILY LIMITED TO: PRIVATE PARKS, SIDEWALKS AND TRAILS, LANDSCAPING, IRRIGATION, SIGNAGE, ENTRY FEATURES, LIGHTING, FENCING, AND OTHER USES AS MAY BE PERMITTED BY THE CITY OF COWETA, AND FOR UTILITIES.

3. THE OWNER/DECLARANT DOES HEREBY ESTABLISH AND GRANT TO THE PUBLIC A PERPETUAL EASEMENT ON, OVER, AND ACROSS RESERVES G AND I, DESIGNATED ON THE ACCOMPANYING PLAT AS "STORM WATER DETENTION EASEMENT", FOR THE PURPOSES OF PERMITTING THE FLOW, CONVEYANCE, DETENTION, RETENTION, AND DISCHARGE OF STORMWATER RUNOFF FROM THE VARIOUS AREAS WITHIN THE SUBDIVISION.

4. RESERVE H IS DESIGNATED TO BE USED FOR OPEN SPACE AND AQUATIC ECOSYSTEM PRESERVE AND IS RESERVED FOR FUTURE CONVEYANCE TO THE HOME OWNERS ASSOCIATION AS SET FORTH IN SECTION III. HEREIN.

5. RESERVE H IS HEREBY IDENTIFIED AND DEDICATED AS A PERPETUAL AQUATIC ECOSYSTEM PRESERVE AS SET FORTH BY THE U.S. ARMY CORPS OF ENGINEERS, WITHIN RESERVE B, INCLUDING BUT NOT LIMITED TO DRAINING, MOWING, CLEARING, ETC., SHALL BE PERFORMED ONLY WITH THE APPROVAL OF THE U.S. ARMY CORPS OF ENGINEERS AND THE CITY OF COWETA, OKLAHOMA. IT SHALL BE THE RESPONSIBILITY OF THE HOME OWNERS ASSOCIATION TO PROPERLY POST AND MONITOR ALL ACTIVITIES WITHIN RESERVE H TO ENSURE COMPLIANCE WITH ALL LOCAL, STATE, AND FEDERAL REGULATIONS.

6. ALL COSTS AND EXPENSES ASSOCIATED WITH ALL RESERVE AREAS, INCLUDING MAINTENANCE OF VARIOUS IMPROVEMENTS AND RECREATIONAL FACILITIES, SHALL BE THE RESPONSIBILITY OF THE OWNER THEREOF, WHICH SHALL BE THE HOME OWNERS ASSOCIATION, AS PROVIDED IN SECTION III. HEREIN, UPON CONVEYANCE OF THE RESERVE AREAS TO THE ASSOCIATION, THE CITY OF COWETA SHALL NOT BE LIABLE FOR ANY DAMAGE OR REMOVAL OF ANY LANDSCAPING OR IRRIGATION SYSTEMS IN ANY RESERVE AREA.

7. EACH LOT AND RESERVE AREA OWNER OR RESIDENT AGREES TO HOLD HARMLESS THE OWNER AND THE CITY OF COWETA, OKLAHOMA, AND THEIR RESPECTIVE AGENTS AND REPRESENTATIVES, FROM ALL CLAIMS, DEMANDS, LIABILITIES, OR DAMAGES ARISING IN CONNECTION WITH THE OWNERSHIP OR USE OF THE FACILITIES AND IMPROVEMENTS CONSTRUCTED OR SITUATED IN THE RESERVE AREAS AND FURTHER AGREES THAT NEITHER THE CITY OF COWETA NOR THE OWNER SHALL BE LIABLE TO THE LOT OR RESERVE AREA OWNER OR RESIDENT OR ANY GUEST, VISITOR, OR INVITEE THEREOF FOR ANY DAMAGE TO PERSON OR PROPERTY CAUSED BY ACTION, OMISSION, OR NEGLIGENCE OF ANY LOT OR RESERVE AREA OWNER OR RESIDENT OR ANY GUEST, VISITOR, OR INVITEE THEREOF.

H. LIMITS OF NO ACCESS

THE OWNER HEREBY RELINQUISHES RIGHT OF INGRESS AND EGRESS TO THE ABOVE DESCRIBED PROPERTY WITHIN THE BOUNDS DESIGNATED ON THE ACCOMPANYING PLAT AS "LIMITS OF NO ACCESS" ("LNA") EXCEPT AS MAY HEREAFTER BE RELEASED, ALTERED, OR AMENDED BY THE LOT OR RESERVE AREA OWNER AND COWETA PLANNING COMMISSION, OR ITS SUCCESSORS, OR AS OTHERWISE PROVIDED BY THE STATUTES AND LAWS OF THE STATE OF OKLAHOMA, PERTAINING THERETO. THE FOREGOING COVENANT CONCERNING "LIMITS OF NO ACCESS" SHALL BE ENFORCEABLE BY THE CITY OF COWETA, OR ITS SUCCESSORS, AND THE OWNER OF EACH LOT OR RESERVE AREA AGREES TO BE BOUND HEREBY.

SECTION II. PLANNED UNIT DEVELOPMENT RESTRICTIONS

WHEREAS, THE PROPERTY COMPRISING "THE WOODS BLOCKS 18-24" WAS SUBMITTED AS PART OF A PLANNED UNIT DEVELOPMENT (PUD) NO. PUD-R 13-02 ("COWETA CROSSING") AS PROVIDED WITHIN CHAPTER 16 OF THE ZONING CODE OF THE CITY OF COWETA, OKLAHOMA, AND

WHEREAS, PUD NO. PUD-R 13-02 WAS AFFIRMATIVELY RECOMMENDED BY THE CITY OF COWETA PLANNING COMMISSION ON FEBRUARY 24, 2014, AND APPROVED BY THE COWETA CITY COUNCIL ON MARCH 3, 2014 WITH IMPLEMENTING ORDINANCE (ORDINANCE NO. 744) APPROVED MARCH 3, 2014, WITH EMERGENCY CLAUSE ATTACHED, MAKING THE ORDINANCE EFFECTIVE IMMEDIATELY, AND

WHEREAS, THE PLANNED UNIT DEVELOPMENT PROVISIONS OF THE COWETA ZONING CODE REQUIRE THE ESTABLISHMENT OF COVENANTS OF RECORD INURING TO AND ENFORCEABLE BY THE CITY OF COWETA, SUFFICIENT TO INSURE THE IMPLEMENTATION AND CONTINUED COMPLIANCE WITH THE APPROVED PLANNED UNIT DEVELOPMENT AND ANY AMENDMENTS THERETO, AND

WHEREAS, THE OWNER DESIRES TO AND DOES HEREBY ESTABLISH THE FOLLOWING RESTRICTIONS FOR THE PURPOSE OF PROVIDING FOR THE ORDERLY DEVELOPMENT OF THE SUBDIVISION AND ALL PROPERTY THEREIN AND TO INSURE ADEQUATE RESTRICTIONS FOR THE MUTUAL BENEFIT OF THE OWNER, ITS SUCCESSORS AND ASSIGNS, ALL FUTURE LOT OWNERS, AND THE CITY OF COWETA, OKLAHOMA.

NOW, THEREFORE, THE OWNER DOES HEREBY IMPOSE, THE FOLLOWING RESTRICTIONS AND COVENANTS WHICH SHALL BE COVENANTS RUNNING WITH THE LAND AND SHALL BE BINDING UPON THE OWNER, ITS SUCCESSORS AND ASSIGNS, AND SHALL BE ENFORCEABLE AS HEREINAFTER SET FORTH.

A. GENERAL

1. DEVELOPMENT IN ACCORDANCE WITH PUD THE SUBDIVISION SHALL BE DEVELOPED AND USED IN SUBSTANTIAL ACCORDANCE WITH THE RESTRICTIONS AND DEVELOPMENT STANDARDS OF PUD NO. PUD-R 13-02, AS APPROVED BY THE CITY OF COWETA, OR IN SUBSTANTIAL ACCORDANCE WITH SUCH MODIFICATIONS OR AMENDMENTS OF THE RESTRICTIONS AND DEVELOPMENT STANDARDS OF PUD-R 13-02 AS MAY BE SUBSEQUENTLY APPROVED.

2. APPLICABLE ORDINANCE THE DEVELOPMENT OF THE SUBDIVISION SHALL BE SUBJECT TO THE PLANNED UNIT DEVELOPMENT PROVISIONS OF THE CITY OF COWETA ZONING CODE AS SUCH PROVISIONS EXISTED ON MARCH 3, 2014.

B. DEVELOPMENT STANDARDS FOR PUD-R 13-02 DEVELOPMENT AREA B (RESIDENTIAL SINGLE-FAMILY- SCHOOL SITE- MUNICIPAL COMMUNITY CENTER, GOLF COURSE/ DRIVING RANGE) (ALL OF "THE WOODS BLOCKS 18-24", AS LEGALLY DESCRIBED IN PUD)

LAND AREA:*
GROSS: 276.735 ACRES 12,054,576 SQUARE FEET
NET: 276.735 ACRES 12,054,576 SQUARE FEET
* LAND AREA CALCULATIONS MAY DIFFER BETWEEN ORIGINAL PUD (QUOTED HERE) AND THIS PLAT. DEVELOPMENT AREA B OF ORIGINAL PUD INCLUDED AREAS NOT A PART OF THIS PLAT.

PERMITTED USES (TO BE ALLOWED BY RIGHT): THOSE PERMITTED PRINCIPAL USES, PERMITTED ACCESSORY USES AND USES PERMITTED BY SPECIAL EXCEPTION IN THE RS ZONING DISTRICT, IN ACCORDANCE WITH SECTIONS 410, 420, 430, 440 IN THE ZONING CODE. PROVIDED, BARS, TAVERNS, NIGHT CLUBS AND ADULT ENTERTAINMENT ESTABLISHMENTS SHALL BE PROHIBITED, EXCEPT THAT ANY RESTAURANT OR EATING ESTABLISHMENT CONSTRUCTED ON THE SITE SHALL BE PERMITTED TO SERVE ALCOHOLIC BEVERAGES AND HAVE A SEPARATE BAR AREA AS PART OF THE ESTABLISHMENT, SUBJECT TO COMPLIANCE WITH STATE LAW REGULATING THE SALE OF ALCOHOLIC BEVERAGES.

THE MINIMUM YARD REQUIREMENTS FOR RS-2 WILL APPLY TO ALL SINGLE FAMILY RESIDENTIAL ZONED LOTS. AT THE TIME OF THE FILING OF THIS PLAT, THE SAME ARE:

FRONT: 25 FEET (NO HOUSES WILL FRONT 121ST STREET SOUTH)
REAR: 20 FEET
REAR: 25 FEET (BACKING TO 121ST STREET SOUTH)
SIDE (INTERIOR): 5 FEET
SIDE (STREET): 15 FEET
SIDE (STREET): 20 FEET (ALONG 121ST STREET SOUTH)
MAXIMUM BUILDING HEIGHT: THREE STORY**
45 FEET IN HEIGHT

** (THREE STORY HEIGHT MAY VARY DEPENDING ON TYPE OF FINISH.)

MINIMUM LOT AREA 5,000 SQUARE FEET
MINIMUM LOT WIDTH 50 FEET

C. DEVELOPMENT STANDARDS FOR ALL PROPERTY

1. LANDSCAPED AREA AND SCREENING ALL DEVELOPMENT AND CONSTRUCTION SHALL COMPLY WITH CHAPTER 24 OF THE ZONING CODE.

2. SIGNS SIGNAGE SHALL COMPLY WITH CHAPTER 18 OF THE ZONING CODE, WITH THE MAXIMUM SURFACE AREA OF A TEMPORARY OR PERMANENT SIGN SIZE BEING 192 SQUARE FEET.

NO SIGN PERMITS SHALL BE ISSUED FOR ERECTION OF A SIGN WITHIN THE PUD UNTIL A DETAIL SIGN PLAN FOR THE PROPERTY HAS BEEN SUBMITTED TO THE CITY OF COWETA OFFICIAL (WHO HAS AUTHORITY TO ISSUE SIGN PERMITS) AND APPROVED AS BEING IN COMPLIANCE WITH THE APPROVED PUD DEVELOPMENT STANDARDS.

EACH AND EVERY SIGN WILL BE ARCHITECTURALLY PLEASING AND WELL LANDSCAPED.

Preliminary Plat
PUD-R 13-02
The Woods
BLOCKS 18-24

PART OF THE NORTHWEST QUARTER (NW/4) AND PART OF THE SOUTHWEST QUARTER (SW/4)
AND PART OF THE SOUTHEAST QUARTER, ALL IN SECTION THIRTY-SIX (36)
TOWNSHIP EIGHTEEN (18) NORTH, RANGE FIFTEEN (15) EAST OF THE INDIAN MERIDIAN
A SUBDIVISION WITHIN THE CITY OF COWETA, WAGONER COUNTY, STATE OF OKLAHOMA

SUCH AS A COVERED ENTERTAINMENT AREA, GUEST HOUSE, POOL HOUSE, STORAGE BUILDING, OR OTHER STRUCTURE, SHALL CONFORM TO THE BASIC STYLING AND MATERIALS OF THE RESIDENTIAL DWELLING. ANY DETACHED STRUCTURE CONTEMPLATED FOR CONSTRUCTION BY ANY HOME OWNER OR LOT OWNER MUST, PRIOR TO CONSTRUCTION, SUBMIT ACCEPTABLE PLANS TO THE COMMITTEE FOR APPROVAL. THE COMMITTEE HAS COMPLETE AND SOLE DISCRETION TO APPROVE, MODIFY, DENY OR CHANGE ANY REQUEST FOR AN ADDITION TO ANY EXISTING STRUCTURE.

H. TEMPORARY STRUCTURES

NO TRAILER, MOBILE HOME, TENT, CONSTRUCTION SHACK, OR OTHER OUTBUILDING SHALL BE ERECTED ON ANY LOT IN THE SUBDIVISION EXCEPT FOR TEMPORARY USE BY CONSTRUCTION CONTRACTORS FOR A REASONABLE PERIOD OF TIME.

I. FENCES

NO FENCE SHALL BE CONSTRUCTED ON ANY SAID LOT IN THE AREA BETWEEN THE FRONT BUILDING LINE OF ANY DWELLING AND THE FRONT LOT LINE OF ANY SAID LOT. NO FENCE ON A CORNER LOT SHALL BE CONSTRUCTED BEYOND THE STREET SIDE SET-BACK LINE TOWARD THE STREET EXCEPT FOR THE COMMUNITY ENTRY. FURTHER, THE PLACEMENT/LOCATION OF ANY PERIMETER FENCING AROUND THE SUBDIVISION AS INITIALLY INSTALLED BY THE DECLARANT AND/OR ORIGINAL DEVELOPER MAY NOT BE ADJUSTED, RELOCATED OR MOVED WITHOUT THE PRIOR CONSENT OF THE COMMITTEE AND/OR THE BOARD. ANY PRIVACY FENCE SHALL BE CONSTRUCTED SO THAT THE FRAMING SHALL BE TOWARD THE INSIDE OF THE OWNER'S LOT. ALL FENCES MUST BE INSTALLED BY A PROFESSIONAL INSTALLER AND SHALL BE SIX FOOT (6') WOOD PRIVACY FENCING WITH VERTICAL BOARDS (NOT HORIZONTAL) AND NO CHAIN-LINK FENCES, WIRE, HOG WIRE, OR OTHER SIMILAR MATERIALS SHALL BE PERMITTED. PRIOR TO INSTALLATION, THE FENCE DESIGN AND NAME OF THE INSTALLER MUST BE APPROVED BY THE COMMITTEE.

J. MAILBOXES

ALL MAILBOXES SHALL BE APPROVED BY THE UNITED STATES POSTAL SERVICE. THE TYPE OF CONSTRUCTION SHALL BE CONSISTENT WITH THE DESIGN ESTABLISHED BY THE DEVELOPER. COMMUNITY MAILBOX IS AN APPROVED ALTERNATIVE SUBJECT TO APPROVAL OF THE UNITED STATES POSTAL SERVICE.

K. SIGNS

NO SIGN OF ANY KIND SHALL BE DISPLAYED TO THE PUBLIC VIEW ON ANY LOT EXCEPT ONE PROFESSIONAL SIGN ADVERTISING THE PROPERTY FOR SALE, REALE OR RENT, OR SIGNS USED BY BUILDER OR AGENT TO ADVERTISE THE PROPERTY DURING THE CONSTRUCTION AND SALE OF A DWELLING THEREON. IN NO EVENT SHALL ANY SUCH SIGN STAND MORE THAN SEVEN (7) FEET ABOVE GROUND LEVEL, NOR BE MORE THAN FIVE (5) SQUARE FEET IN SIZE, NOR BE LIGHTED AT NIGHT. THESE SIGNAGE RESTRICTIONS AND REQUIREMENTS SHALL NOT APPLY TO DECLARANT.

L. PARKED VEHICLES

ALL VEHICLES PARKED IN THE FRONT OF THE FRONT BUILDING LINE MUST BE PARKED ON THE DRIVEWAY. NO INOPERATIVE VEHICLES OF ANY NATURE SHALL BE PERMITTED TO REMAIN ON ANY LOT OR LOTS FOR A PERIOD IN EXCESS OF ONE (1) DAY. IT IS THE INTENTION OF THE DECLARANT THAT, EXCEPT ON SPECIAL OCCASIONS SUCH AS HOLIDAYS OR EVENTS AT AN OWNER'S RESIDENCE THAT ALL PARKING SHALL BE IN DRIVEWAYS AND NOT ON A STREET OR ANY YARD. ACCORDINGLY, NO VEHICLE SHALL BE PARKED ON THE STREET FOR MORE THAN TWO (2) CONSECUTIVE DAYS AND SHALL NOT BE PARKED OVERNIGHT ON A STREET. ANY VIOLATION OF THIS SECTION MAY RESULT IN A TOWING OF THE VEHICLE AT THE OWNER'S EXPENSE PER MUNICIPAL REGULATIONS. NO VEHICLE MAINTENANCE SHALL BE PERFORMED ON THE STREETS OR IN THE FRONT YARDS OR ON PARKING PADS OF ANY LOT.

M. APPEARANCE OF LOT

ALL OWNERS SHALL BE REQUIRED TO KEEP THEIR LOT IN A CLEAN AND SANITARY CONDITION WHETHER OR NOT THEY HAVE CONSTRUCTED A RESIDENCE ON THE LOT. ALL OPEN AREAS ON LOTS SHALL BE KEPT MOWED TO A HEIGHT OF NOT MORE THAN SIX (6) INCHES. NO PLAYGROUNDS, SWING SETS, TRAMPOLINES, SWIMMING POOLS, PICNIC TABLES, OR OTHER SIMILAR EQUIPMENT IS ALLOWED IN THE FRONT YARDS OF ANY LOT. THE BOARD AND COMMITTEE MAY PROMULGATE RULES AND REGULATIONS REGARDING THE MAINTENANCE OF LOTS AND ADEQUATE ENFORCEMENT MECHANISMS IN THE EVENT A LOT IS NOT PROPERLY MAINTAINED. UPON FAILURE OF THE OWNER TO MAINTAIN OR LANDSCAPE THE GROUNDS OF ANY LOT IN ACCORDANCE WITH THE PROVISIONS ABOVE, THE ASSOCIATION MAY, UPON 15 DAYS WRITTEN NOTICE TO THE OWNER, CAUSE THE GRASS, WEEDS AND VEGETATION TO BE CUT. THE COST OF ANY MAINTENANCE REQUIRED UNDER THIS SECTION AND ANY ENFORCEMENT COSTS SHALL BE ASSESSED TO THE OWNER, AND SHALL CONSTITUTE A LIEN UPON THE LOT, AND MAY BE COLLECTED IN ACCORDANCE WITH SECTION III.C.

N. RECREATIONAL VEHICLES AND ACCESSORIES

NO BOATS, TRAILERS, RECREATIONAL VEHICLES, OR VEHICLES USED FOR RECREATIONAL PURPOSES ARE ALLOWED IN THE SUBDIVISION UNLESS THEY WILL FIT ENTIRELY INTO A PRIVATE GARAGE.

SECTION II. PLANNED UNIT DEVELOPMENT RESTRICTIONS (CONTINUED)

3. LIGHTING FLASHING SIGNS, CHANGEABLE COPY SIGNS, RUNNING LIGHT OR TWINKLE SIGNS, ANIMATED SIGNS, REVOLVING OR ROTATING SIGNS WITH MOVEMENT SHALL BE PROHIBITED, EXCEPT AS MAY BE PERMITTED BY THE COWETA ZONING CODE AS PART OF THE APPROVED DETAIL SIGN PLAN.

LIGHTING USED TO ILLUMINATE THE DEVELOPMENT AREA SHALL BE SO ARRANGED AS TO SHIELD AND DIRECT THE LIGHT AWAY FROM ADJACENT RESIDENTIAL AREAS AND RESIDENTIAL USES WITHIN THE PUD. NO LIGHT STANDARD OR BUILDING-MOUNTED LIGHT SHALL EXCEED FIVE STORIES IN HEIGHT.

4. TRASH, MECHANICAL AND EQUIPMENT AREAS THERE SHALL BE NO STORAGE OF RECYCLEABLE MATERIALS, TRASH OR SIMILAR MATERIAL OUTSIDE A SCREENED RECEPTACLE. ALL TRASH, MECHANICAL AND EQUIPMENT AREAS, INCLUDING BUILDING MOUNTED, SHALL BE SCREENED FROM PUBLIC VIEW IN SUCH A MANNER THAT THE AREAS CANNOT BE SEEN FROM A PUBLIC STREET.

5. TOPOGRAPHY, DRAINAGE AND UTILITIES DRAINAGE. ALL STORM WATER DRAINAGE STRUCTURES SHALL BE INSTALLED AND MAINTAINED IN ACCORDANCE WITH ALL APPLICABLE CITY OF COWETA ORDINANCES AND REGULATIONS.

A PROFESSIONAL ENGINEER REGISTERED IN THE STATE OF OKLAHOMA SHALL CERTIFY TO THE APPROPRIATE CITY OFFICIAL THAT ALL REQUIRED STORMWATER DRAINAGE STRUCTURES SERVING THE SITE HAVE BEEN INSTALLED IN ACCORDANCE WITH THE APPROVED PLANS PRIOR TO ISSUANCE OF AN OCCUPANCY PERMIT ON THAT PROPERTY.

DURING CONSTRUCTION ON THE PROPERTY, THE OWNER WILL PROVIDE ADEQUATE AND REASONABLE EROSION CONTROL, AND, AFTER CONSTRUCTION, THEY WILL PROVIDE AND MAINTAIN VEGETATIVE, LANDSCAPED GROUND COVER SO THAT SOIL DOES NOT ERODE ON OR FROM THE PROPERTY.

6. ACCESS, CIRCULATION AND PARKING ACCESS, TRAFFIC CIRCULATION AND PARKING AREAS ARE DEPICTED ON EXHIBIT F OF THE PUD. SOME OF THE DRIVES AND PARKING AREAS WITHIN THE PUD MAY BE PRIVATELY OWNED AND MAINTAINED. PUBLIC STREETS THROUGH DEVELOPMENT AREA B WILL BE PUBLICLY OWNED AND MAINTAINED. MUTUAL ACCESS BETWEEN AND ACROSS INDIVIDUAL PROPERTIES AND MUTUAL PARKING PRIVILEGES WITHIN THE PUD SHALL BE PROVIDED BY A MUTUAL ACCESS AGREEMENT TO BE RECORDED IN OFFICE OF THE WAGONER COUNTY CLERK BY THE OWNER/DEVELOPER.

PEDESTRIAN ACCESS AND CIRCULATION SHALL BE DEPICTED ON THE DETAILED SITE PLAN DRAWING AND/OR LANDSCAPE PLAN REQUIRED BY THE CITY OF COWETA, AS STATED ABOVE, ALL MUTUAL ACCESS DRIVES IN THE PUD MAY BE PRIVATE DRIVES, WHICH SHALL BE CONSTRUCTED IN ACCORDANCE WITH ALL APPLICABLE CITY OF COWETA CODES, REGULATIONS AND STANDARDS.

SECTION III. HOME OWNERS ASSOCIATION

A. FORMATION OF HOME OWNERS ASSOCIATION; ADDITIONAL LANDS

THE OWNER HAS FORMED OR SHALL CAUSE TO BE FORMED A HOME OWNERS ASSOCIATION ("HOA") TO GOVERN THE SUBDIVISION. THE HOA SHALL BE ESTABLISHED IN ACCORDANCE WITH THE STATUTES OF THE STATE OF OKLAHOMA AND BYLAWS PREPARED BY OWNER OR ITS ASSIGNEE, FOR THE GENERAL PURPOSES OF MAINTAINING THE COMMON AREAS, INCLUDING WITHOUT LIMITATION ALL RESERVE AREAS, AND ENHANCING THE VALUE, DESIRABILITY AND ATTRACTIVENESS OF THE SUBDIVISION AND ANY ADDITIONS THERETO. OWNER SHALL BE ENTITLED TO APPOINT THE BOARD OF DIRECTORS FOR THE HOA AS PROVIDED IN THE BYLAWS. IT IS CONTEMPLATED THAT ADDITIONAL LANDS/PHASES ADJOINING THE SUBDIVISION, AND SUBSEQUENTLY PLATTED FOR SINGLE FAMILY RESIDENTIAL PURPOSES, LIKE THE PROPERTY DESCRIBED HEREIN, MAY BE ANNEXED BY THE OWNER (OR ITS ASSIGNEE OR AN AFFILIATED CORPORATE OWNER) TO THE SUBDIVISION, "THE WOODS BLOCKS 1-9", AND GEOGRAPHIC JURISDICTION AND BYLAWS OF THE HOA, WHICH MAY BE ACCOMPLISHED BY THE OWNER (OR ITS ASSIGNEE OR AN AFFILIATED CORPORATE OWNER) BY FILING A SUPPLEMENTAL DECLARATION THERETO, OR BY NOTING SUCH ANNEXATION ON A SEPARATE DEED OF DEDICATION FOR THE ADDITIONAL LANDS/PHASES TO BE ANNEXED HERETO, OR OTHER INSTRUMENT ADDING SUCH ADDITIONAL LANDS/PHASES TO THE SUBDIVISION AND THE JURISDICTION OF THE HOA, IN WHICH CASE ANY SUCH LANDS/PHASES, SUCH AS THE PROPERTY DESCRIBED HEREIN, AND THE SUBSEQUENT OWNERS THEREOF SHALL BE UNDER THE JURISDICTION OF THE HOA AND ALL RULES PERTAINING THERETO, AND, IN ACCORDANCE THEREWITH, OWNER DOES HEREBY NOTE AND ANNEX THE PROPERTY DESCRIBED HEREIN TO THE ORIGINAL/PREVIOUSLY ESTABLISHED SUBDIVISION, "THE WOODS BLOCKS 1-9", AND GEOGRAPHIC JURISDICTION AND BYLAWS OF THE HOA.

B. MEMBERSHIP

EVERY PERSON OR ENTITY WHO ACCEPTS A DEED FOR A LOT IN THE SUBDIVISION AND IS A RECORD OWNER OF THE FEE INTEREST OF A LOT IN THE SUBDIVISION SHALL BE APPURTENANT TO AND SHALL NOT BE SEPARATED FROM OWNERSHIP OF A LOT.

C. ASSESSMENTS

EACH OWNER OF A LOT WITHIN THE SUBDIVISION, EXCEPT OWNER/DECLARANT, BY ACCEPTANCE OF A DEED THEREOF, IS DEEMED TO COVENANT AND AGREE TO PAY TO THE HOA CERTAIN ASSESSMENTS TO BE ESTABLISHED BY THE BOARD OF DIRECTORS IN ACCORDANCE WITH THESE COVENANTS AND AS AMENDED AND THE BYLAWS OF THE HOA, TO BE EXECUTED BY THE OWNER FOR THE MAINTENANCE AND IMPROVEMENT OF THE COMMON AREAS OWNED OR MAINTAINED BY THE HOA AND FOR OTHER PURPOSES WHICH BENEFIT THE SUBDIVISION AND THE OWNERS OF LOTS THEREIN, AND ANY UNPAID SUCH ASSESSMENTS SHALL BE A LIEN ON THE LOT AGAINST WHICH IT IS MADE, BUT THE LIEN SHALL BE SUBORDINATE TO THE LIEN OF ANY FIRST MORTGAGE.

D. MAINTENANCE OF COMMON AREAS

THE HOA SHALL BE RESPONSIBLE FOR THE MAINTENANCE OF ALL COMMON AREAS AS DEPICTED ON THE PLAT, OR AS DESCRIBED IN THESE COVENANTS, AND AS AMENDED, WHICH MAY INCLUDE BUT NOT BE LIMITED TO ENTRYWAYS, DRAINAGE AND DETENTION/RETENTION FACILITIES, PERIMETER FENCING, AND OTHER COMMON AREAS AND RESERVE AREAS AS DEPICTED ON THE PLAT, OR DESCRIBED IN THESE COVENANTS, AND AS AMENDED.

E. LIMITATION ON LIABILITY

THE HOA SHALL BE ENTITLED TO ALL PROTECTIONS AFFORDED UNDER OKLAHOMA'S GENERAL CORPORATION ACT AND ANY OTHER LAWS PROVIDING PROTECTION TO OWNER'S ASSOCIATIONS. NEITHER ANY MEMBER NOR OWNER, NOR THE DIRECTORS AND OFFICERS OF THE HOA SHALL BE PERSONALLY LIABLE FOR DEBTS CONTRACTED FOR

OR OTHERWISE INCURRED BY THE HOA OR FOR ANY TORTS COMMITTED BY OR ON BEHALF OF THE HOA OR OTHERWISE. NEITHER THE OWNER, THE HOA, ITS DIRECTORS, OFFICERS, AGENTS OR EMPLOYEES SHALL BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES, FOR FAILURE TO INSPECT ANY PREMISES, IMPROVEMENTS OR PORTION THEREOF, OR FOR FAILURE TO REPAIR OR MAINTAIN THE SAME.

SECTION IV. RESTRICTIVE COVENANTS

THE SUBDIVISION (AND EACH LOT SITUATED THEREIN) SHALL BE CONSTRUCTED, DEVELOPED, OCCUPIED AND USED AS FOLLOWS.

A. NO DIVISION OF LOTS

NO LOT MAY BE DIVIDED OR SPLIT.

B. RESIDENTIAL LOTS

ALL LOTS WITHIN THE SUBDIVISION SHALL BE USED, KNOWN AND DESCRIBED AS RESIDENTIAL LOTS. ONLY ONE SINGLE FAMILY RESIDENTIAL DWELLING SHALL BE PERMITTED ON EACH LOT. IN ADDITION, ONLY CUSTOMARY AND USUAL NECESSARY STRUCTURES MAY BE CONSTRUCTED ON EACH LOT AS MAY BE PERMITTED BY THE CITY. NO BUILDING OR STRUCTURE INTENDED FOR OR ADAPTED TO BUSINESS PURPOSES SHALL BE ERECTED, PLACED, PERMITTED OR MAINTAINED ON ANY LOT. THIS COVENANT SHALL BE CONSTRUED AS PROHIBITING THE ENGAGING IN OR PRACTICE OF ANY COMMERCE, INDUSTRY, BUSINESS, TRADE OR PROFESSION WITHIN THE SUBDIVISION AND/OR WITHIN ANY LOT. THE RESTRICTIONS ON USE HEREIN CONTAINED SHALL BE CUMULATIVE OF AND IN ADDITION TO SUCH RESTRICTIONS ON USAGE AS MAY FROM TIME TO TIME BE APPLICABLE UNDER AND PURSUANT TO THE STATUTES, RULES, REGULATIONS AND ORDINANCES OF THE CITY OR ANY OTHER GOVERNMENTAL AUTHORITY OR POLITICAL SUBDIVISION HAVING JURISDICTION OVER THE SUBDIVISION.

C. RESIDENTIAL PURPOSES

BY ACQUISITION OF ANY LOT WITHIN THE SUBDIVISION, EACH OWNER (EXCLUDING BONA FIDE HOME BUILDERS) COVENANTS WITH AND REPRESENTS TO THE DECLARANT AND TO THE ASSOCIATION THAT THE LOT IS BEING SPECIFICALLY ACQUIRED FOR THE SPECIFIC AND SINGULAR PURPOSE OF CONSTRUCTING AND USING A SINGLE FAMILY RESIDENTIAL DWELLING THEREON, OR AS A RESIDENCE FOR SUCH OWNER AND/OR OWNER'S IMMEDIATE FAMILY MEMBERS.

D. SUBMISSION OF PLANS

IN ORDER TO MAINTAIN A BEAUTIFUL AND PLEASING SETTING IN THE SUBDIVISION TWO (2) SETS OF BUILDING AND SITE IMPROVEMENT PLANS AND SPECIFICATIONS MUST BE SUBMITTED TO THE ARCHITECTURAL CONTROL COMMITTEE ("COMMITTEE") FOR ITS APPROVAL PRIOR TO THE COMMENCEMENT OF CONSTRUCTION. THE COMMITTEE SHALL ACT TO ENFORCE THE REQUIREMENTS OF THESE COVENANTS IN A REASONABLE MANNER. THE COMMITTEE HAS THE AUTHORITY TO MAINTAIN THE ARCHITECTURAL CONFORMITY OF THE SUBDIVISION, AND IN CONSIDERATION THEREOF SHALL DETERMINE THAT THE PROPOSED CONSTRUCTION SHALL NOT DETRACT FROM THE DEVELOPMENT AND SHALL ENHANCE THE PURPOSE OF THE DEVELOPMENT TO PROVIDE A BEAUTIFUL AND PLEASING SETTING IN THE SUBDIVISION. THE COMMITTEE SHALL CONSIDER SUCH MATTERS AS THE PROPOSED SQUARE FOOTAGE, LOCATION, MATERIALS, EXTERIOR STYLE AND LANDSCAPING, ETC. THE COMMITTEE MAY ADOPT RULES OR BYLAWS EXPLAINING THE MECHANICS OF ITS OPERATION AND PROVIDING FOR A TWENTY-ONE (21) DAY MAXIMUM TIME WITHIN WHICH PLANS MUST BE REVIEWED AND APPROVED OR DISAPPROVED AFTER SUBMISSION, AND IF NOT APPROVED OR DISAPPROVED IN THAT PERIOD, THAT THE SAME SHALL BE CONSIDERED AS AUTOMATICALLY APPROVED. THE BOARD MAY ALSO EXERCISE THE DUTIES OF THE COMMITTEE IN THE EVENT THE BOARD DEEMS IT NECESSARY AND EFFICIENT TO DO SO.

E. ARCHITECTURAL REQUIREMENTS

- EACH DWELLING SHALL FRONT A DEDICATED PUBLIC STREET.
- NO BUILDING SHALL BE LOCATED CLOSER TO THE STREET THAN THE MINIMUM BUILDING OR SET-BACK LINES SHOWN ON THE RECORDED PLAT.
- ALL RESIDENCES SHALL HAVE ROOF SHINGLES THAT ARE GREY OR BLACK IN COLOR, PREFERABLY WEATHERWOOD. DEVIATION FROM THIS COLOR REQUIRES APPROVAL FROM THE COMMITTEE.

F. ADDITIONS TO EXISTING STRUCTURES

ALL ADDITIONS SHALL CONFORM TO THE BASIC STYLING AND MATERIALS OF THE DWELLING ON ANY LOT. ALL ADDITIONS SHALL FALL WITHIN THE BUILDING SET-BACKS ON SAID LOT AND SHALL NOT BE PLACED OVER ANY DRAINAGE OR UTILITY EASEMENT.

ALL IMPROVEMENTS SHALL BE CONSTRUCTED IN ACCORDANCE TO APPLICABLE CITY CODES, RULES AND REGULATIONS. ANY ADDITIONS CONTEMPLATED BY THE HOME OWNER OR LOT OWNER MUST SUBMIT PLANS PRIOR TO CONSTRUCTION TO THE COMMITTEE FOR APPROVAL. THE COMMITTEE HAS COMPLETE AND SOLE DISCRETION TO APPROVE, MODIFY, DENY OR CHANGE ANY REQUEST FOR AN ADDITION TO AN EXISTING STRUCTURE.

G. GARAGE AND DETACHED STRUCTURES AND STORAGE BUILDINGS

ALL RESIDENCES CONSTRUCTED IN THE SUBDIVISION SHALL HAVE A MINIMUM OF TWO (2) OFF-STREET PARKING SPACES, TO INCLUDE A PRIVATE GARAGE TO ACCOMMODATE A MINIMUM OF ONE (1) AUTOMOBILE AND A PARKING PAD FOR ONE (1) ADDITIONAL AUTOMOBILE. NO CARPORTS ARE ALLOWED ON THE SIDE, REAR OR FRONT YARDS OF ANY LOTS. EACH GARAGE SHALL BE FULLY ENCLOSED AND CONTAIN A FULL-LENGTH OVERHEAD STYLE DOOR. ALL GARAGE DOORS ARE TO BE KEPT CLOSED WHEN NOT ENTERING OR EXITING THE GARAGE. ANY DETACHED STRUCTURE TO BE BUILT ON A LOT,

IN WITNESS WHEREOF, TULSA L DEV., LLC, AN OKLAHOMA LIMITED LIABILITY COMPANY, HAS EXECUTED THIS INSTRUMENT ON THIS _____ DAY OF _____, 2024.

TULSA L DEV., LLC
AN OKLAHOMA LIMITED LIABILITY COMPANY

BY _____
STEPHEN LIEUX, MANAGER

ACKNOWLEDGMENT

STATE OF _____)
) SS
COUNTY OF _____)

ON THIS _____ DAY OF _____, 2024, BEFORE ME, A NOTARY PUBLIC WITHIN AND FOR THE AFORESAID COUNTY AND STATE, DULY COMMISSIONED AND ACTING, APPEARED STEPHEN LIEUX, TO ME PERSONALLY WELL KNOWN AS, OR PROVEN TO BE, THE PERSON WHOSE NAME APPEARS UPON THE WITHIN AND FOREGOING DOCUMENT AND STATED THAT HE WAS THE MANAGER OF TULSA L DEV., LLC, AN OKLAHOMA LIMITED LIABILITY COMPANY, AND WAS DULY AUTHORIZED TO EXECUTE THE FOREGOING CONVEYANCE FOR AND ON ITS BEHALF, AND HE RESPECTIVELY ACKNOWLEDGED TO ME THAT HE HAD EXECUTED THE SAME FOR THE CONSIDERATION AND PURPOSES THEREIN MENTIONED AND SET FORTH, AND I DO SO CERTIFY.


IN TESTIMONY WHEREOF, I HAVE HEREUNTO SET MY HAND AND SEAL OF OFFICE AS SUCH NOTARY PUBLIC AT THE COUNTY AND STATE AFORESAID ON THIS _____ DAY OF _____, 2024.

MY COMMISSION EXPIRES _____ NOTARY PUBLIC

CERTIFICATE OF SURVEY

I, DAN E. TANNER, A LICENSED PROFESSIONAL LAND SURVEYOR IN THE STATE OF OKLAHOMA, DO HEREBY CERTIFY THAT I HAVE CAREFULLY AND ACCURATELY SURVEYED, SUBDIVIDED, AND PLATTED THE TRACT OF LAND HEREIN DESCRIBED ABOVE, AND THAT THE ACCOMPANYING PLAT DESIGNATED AS "THE WOODS BLOCKS 18-24", A SUBDIVISION WITHIN THE CITY OF COWETA, WAGONER COUNTY, STATE OF OKLAHOMA, IS A TRUE REPRESENTATION OF A SURVEY MADE ON THE GROUND USING GENERALLY ACCEPTED PRACTICES AND MEETS OR EXCEEDS THE OKLAHOMA MINIMUM STANDARDS FOR THE PRACTICE OF LAND SURVEYING.

WITNESS MY HAND AND SEAL THIS _____ DAY OF _____, 2024.



BY: _____
DAN E. TANNER
LICENSED PROFESSIONAL LAND SURVEYOR
OKLAHOMA NO. 1435

STATE OF OKLAHOMA)
) SS
COUNTY OF TULSA)

BEFORE ME, THE UNDERSIGNED, A NOTARY PUBLIC IN AND FOR SAID COUNTY AND STATE, ON THIS _____ DAY OF _____, 2024, PERSONALLY APPEARED TO ME DAN E. TANNER KNOWN TO BE THE IDENTICAL PERSON WHO SUBSCRIBED HIS NAME TO THE FOREGOING CERTIFICATE AS LICENSED PROFESSIONAL LAND SURVEYOR, AS HIS FREE AND VOLUNTARY ACT AND DEED, FOR THE USES AND PURPOSES THEREIN SET FORTH.

GIVEN UNDER MY HAND AND SEAL OF OFFICE THE DAY AND YEAR LAST ABOVE WRITTEN.

MY COMMISSION EXPIRES _____ NOTARY PUBLIC



POST OFFICE BOX 850 • COWETA, OKLAHOMA 74429 • PH. (918) 486-2189 • FAX (918) 486-5366 • www.cityofcoweta-ok.gov

Memorandum

To: Honorable Chairman, Members of the Planning Commission
From: Tom E Young Jr, City Planner
Re: Preliminary Plat, The Woods Phase IV Blocks 18-24
Date: 10-16-2023

BACKGROUND

Applicant

The applicant, Tulsa L Dev., LLC, Developer; Tanner Consulting, L.L.C., Surveyor/Engineer; for Preliminary Plat approval of The Woods Phase IV Blocks 18-24, a subdivision of approximately 33.487 acres more or less with 97 lots.

Case Facts

- The property is located in located in Section 36, Township 18 North, Range 15 East, of the Indian Base and Meridian, Wagoner County, State of Oklahoma.
- The property is Part of Planned Unit Development PUD No. PUD-R 13-02, with RS-2 Residential Single Family and RM-1 Residential Multi-Family zoning.
- The property legal description: Part of the North Half of the Southwest Quarter (NE/2 SW/4) and part of the Southeast Quarter (SE/4) of Section Thirty-Six (36), Township Eighteen (18) North, Range Fifteen (15) East of the Indian Base and Meridian, A Subdivision within the City of Coweta, Wagoner County, State of Oklahoma.

Utilities/Site Area: The 33.487 acre more or less, subdivision is proposed to be served by City of Coweta Sewer and Water served by Wagoner Rural Water District Number 5., with the Developer extension of the utility lines. Windstream, ONG, AEP, and Cox have all been notified and a Technical Advisory Committee meeting was held on October 5, 2023.

Pertinent Code

SECTION 2.3.5.E PLANNING COMMISSION ACTION:

- The Planning Commission shall,
 1. hold a public hearing on the preliminary plat,
 2. the preliminary plat shall be reviewed by the Planning Commission for conformity with the Comprehensive Land Use Plan of the City of Coweta, and for compliance with the standards requirements and principles hereinafter prescribed; and, shall be reviewed by the Planning Commission staff for compliance with all applicable additional requirements of all governmental authorities and agencies, and with all applicable regulations of public utilities.

PLANNING COMMISSION ACTION

The Planning Commission can approve, conditionally approve, or disapprove the preliminary plat. If the preliminary plat is approved with conditions, the Planning Commission may require the subdivider to submit a revised preliminary plat. The subdivider shall be advised of any amendments required by the Planning Commission to comply with these regulations. If the preliminary plat is disapproved, the reasons for that action shall be stated.

Staff recommends approval of The Woods Phase IV Blocks 18-24 on the condition that the developer meet the comments from the Technical Advisory Committee and the City Engineer.

ATTACHMENTS

1. Preliminary Plat The Woods Phase IV Blocks 18-24